




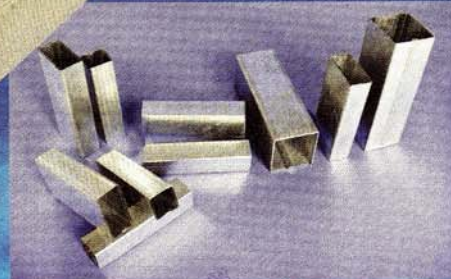

TONG YONG METAL SDN. BHD.
通園金

UNI-Interlocked™

STEEL PIPE

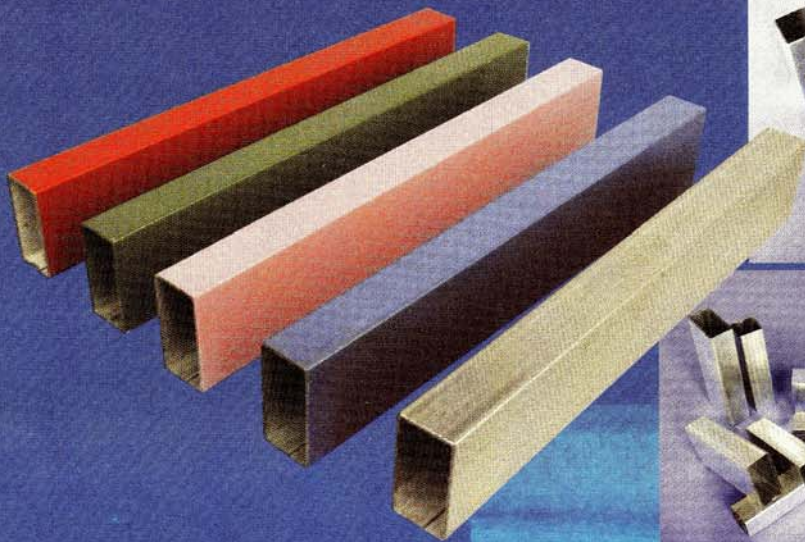


MS ISO 9001 : 2000 REG. NO. AR3261

PRODUCTS

TECHNICAL SPECIFICATION

- 1 COATING SPECIFICATION
JIS G3302, JIS G3312ASTM A653(M), EN10142
- 2 MECHANICAL PROPERTIES
TENSILE STRENGTH = MIN 550 N/mm²
- 3 TYPES OF COATING
- HOT DIPPED GALVANIZED
- PREPAINTED GALVANIZED
- 4 LENGTH
STANDARD LENGTH = 6m OR CUSTOMIZED LENGTH
- 5 SIZES
SHS : 25x25mm, 50x50mm,
RHS : 25x50mm, 40x50mm, 40x75mm, 40x100mm, 65x150mm
- 6 THICKNESS
RANGING FROM 0.35mm TO 1.5mm

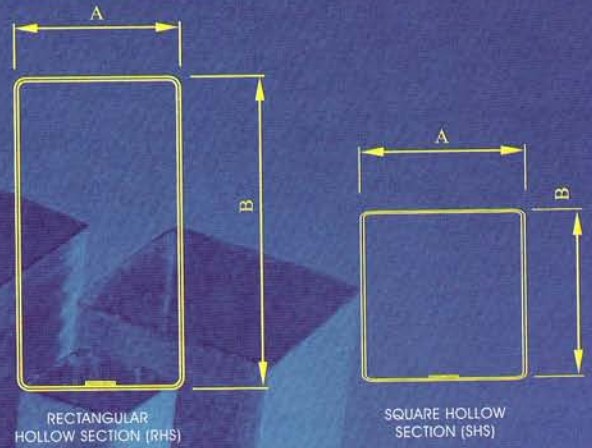


APPLICATIONS

1	ROOF TRUSS
2	RACKING
3	FENCING
4	SIGN BOARD
5	FURNITURE
6	ARGRICULTURAL USAGE
7	AWNING
8	GREENHOUSE
9	FRAMING SYSTEM

SECTION VIEW OF COATING



SECTION VIEW OF PAINT COATING

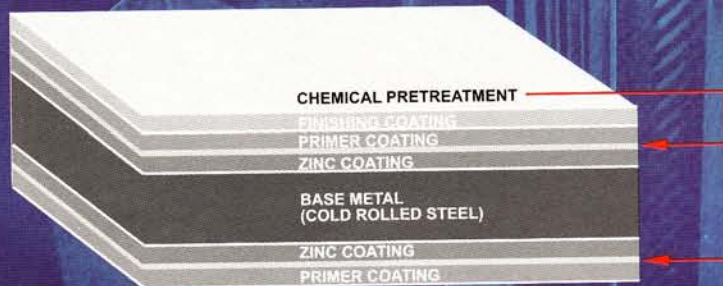

SECTION VIEW OF PAINT COATING



MEMBER PROPERTIES

PROFILE	SIZES (A)X(B) (mm)	THICKNESS (mm)
SHS	25 X 25	0.35
		0.42
		0.55
SHS	50 X 50	0.65
		0.80
		1.00
		1.20

MEMBER PROPERTIES

PROFILE	SIZES (A)X(B) (mm)	THICKNESS (mm)
RHS	25 X 50	0.35
		0.42
		0.55
RHS	40 X 50	0.45
		0.55
RHS	40 X 75	0.55
		0.80
RHS	40 X 100	0.55
		0.80
		1.00
RHS	65 X 150	1.00
		1.20
		1.30
		1.50

Manufactured by



通用金屬有限公司

TONG YONG METAL SDN. BHD.

Office & Factory :

Lot 5781 & 5782, Taman Selamat, Alma,
14000 Bukit Mertajam, Seberang Perai Tengah,
Penang, MALAYSIA.

Tel : 04-5523086 / 89 / 90 Fax : 04-5523087

Branch :

No. 20 & 22, Jalan Anggerik Mokara 31/60,
Kota Kemuning Industrial Park, Kota Kemuning,
40460 Shah Alam, Selangor Darul Ehsan, MALAYSIA.
Tel : 03-51223944 Fax : 03-51215712
Email : tymhl@tm.net.my or tym05@streamyx.com

note: the data and information above are subject to change without prior notice

INTELLECTUAL PROPERTY

UK Patent No. GB2371816 and Taiwan Patent No. 159385 for "A Light Weight Building Material". Registered Industrial Design in Malaysia, UK, USA, Australia, Japan, Taiwan, China, Korea, Thailand, India, Sri Lanka with title "Roof Truss" and "Metal Pipe".